




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : E21B 33/127, 23/06		A1	(11) International Publication Number: WO 00/37769
			(43) International Publication Date: 29 June 2000 (29.06.00)
(21) International Application Number: PCT/NO99/00366 (22) International Filing Date: 6 December 1999 (06.12.99) (30) Priority Data: 19985798 10 December 1998 (10.12.98) NO (71) Applicant (for all designated States except US): RESLINK AS [NO/NO]; Kongsgata 21, N-4330 Ålgård (NO). (72) Inventors; and (75) Inventors/Applicants (for US only): KVERNSTUEN, Ole, Sv. [NO/NO]; Strondlia 4, N-4329 Sandnes (NO). MOEN, Terje [NO/NO]; Diamantveien 36 A, N-4318 Sandnes (NO). (74) Agents: HÅMSØ, Eivind et al.; Håmsø Patentbyrå ANS, Box 171, N-4302 Sandnes (NO).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Norwegian).	

(54) Title: DEVICE BY TOOLS FOR SETTING OF A PRODUCTION PACKER

(57) Abstract

The invention relates to a device by a tool for the setting of an inflatable packer within an annulus (2) between a pipe string (3) and a borehole wall (1) of a production well for hydrocarbons. The main object of the invention is that a packer element (8) arranged thereto shall be inflated by means of, e.g., a two-component thermosetting plastic, and that this is to take place by a more moderate pressure than what has been normal. This is realised in the way that the tool comprises a sleeve element (4), three housing elements (5, 6, 7) positioned externally on the sleeve element (4), and a packer element (8) extending between two of the housing elements (5, 6). The third housing element (7) is arranged so, that the thermosetting plastic is transferred from the housing element (7) to an annular chamber (9) of the tool between the sleeve element (4) and the packer element (8), so that the packer element (8) is inflated into sealing abutment against the bore wall (1) of the well, when, e.g., well fluid from the pipe string (3) is supplied to the housing element (7) at the same time. By the configuration of the third housing element (7) with more chambers (10, 11) for thermosetting plastic than chambers (12) for the well fluid from the pipe string (3), the packer element (8) is inflated at a pressure which is lower than the pressure from the well fluid supplied to the housing element (7).

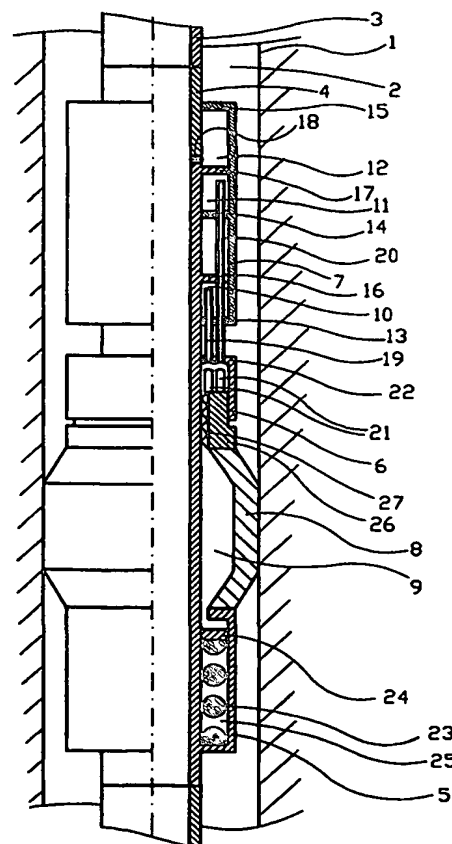

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

DEVICE BY TOOLS FOR SETTING OF A PRODUCTION PACKER.

The invention relates to a device by a tool for the setting of an inflatable packer in an annulus in a well for the extraction of hydrocarbons, in which the annulus is formed
5 between the wall of the well bore and a pipe string, e.g. tubing, which is introduced into a well.

By open hole completion of production wells for hydrocarbons, without the use of cementation and perforated casing, a satisfactory zone isolation of the well is necessary in many
10 cases. The reason for this is that the fluid should be prevented from flowing in an uncontrolled manner in the annulus between the well bore wall and the pipe string. Said zone isolation makes it possible to prevent such uncontrolled flow in the annulus. Thereby it will be possible to control
15 the entering of fluid into the well from the different layers of the ground formation.

Present technique for zone isolation in open well completion, is based on the use of hydraulically inflatable packers or bellows which are set at selected points within the well.

These packers may be inflated by means of for example well fluid. Additionally, there has been developed a system for zone isolation by the use of rubber elements which are compressed mechanically and are forced into sealing abutment
5 against the wall of the well bore.

However, practice shows that the setting of inflatable packers, especially in horizontal wells, is often very problematic. The main reason is that a relatively high setting pressure must be used to operate the valves included
10 in the setting tool. Additionally, the setting pressure will subject the packer to a correspondingly high load. It is not uncommon for the well to obtain an oval cross-sectional shape in the drilling, especially in the drilling of horizontal wells. Said oval cross-sectional shape causes the expansion
15 of the packer to vary along the circumference. The varying expansion of the packer together with said high setting pressure give rise to great loads which at worst may make the packer burst. To ensure a greater stability of the inflated packer over time, it is known for the packer to be filled
20 with cement. The drawback is that such cementation requires a special tool, and additionally it may lead to the risk of cement leakages at undesirable points within the well. Moreover, the cement shrinks when curing, so that the surface pressure between the packer and the wall of the well bore is
25 reduced, or even ceases completely. By the use of packers which are compressed mechanically, only small deviations in the hole geometry are allowed. This involves that such packers do not provide adequate sealing of the annulus of the well. Beyond that, experience data from the North Sea shows
30 that by zone isolation of horizontal wells, more than half the packers do not work satisfactorily.

The main object of the present invention is to provide a device by a tool with an inflatable packer element arranged thereto, which is inflated by means of a hardenable sealing substance, e.g. a two-component thermosetting plastic, to seal the annulus. Other objects are that the packer element is to be inflated by means of a pressure more moderate than what has been common so far. Further, thermal shrinkage of the hardenable sealing substance shall be compensated for, so that the surface pressure of the packer element against the wall of the well bore is maintained in the curing. Thereby the above defects and drawbacks of the known technique can be remedied. As appears from the characterizing part of the present independent claim, this is realized in the way that the tool comprises a sleeve element, three housing elements positioned externally on the sleeve element, and a packer element extending between two of the housing elements, said two housing elements being fixedly arranged on the sleeve element. Further, the third housing element is arranged so, that a hardenable substance is transferred from the housing element to an annulus of the tool between the sleeve element and the packer element, so that the packer element is inflated into sealing abutment against the wall of the well bore when, e.g., well fluid from the pipe string is supplied to the housing element at the same time. The third housing element is formed with several chambers for the hardenable sealing substance and a chamber for the well fluid supplied from the pipe string. This results in the packer element being inflated into sealing abutment against the wall of the well bore by a lower pressure than the pressure of the well fluid supplied to the housing element. Other advantageous features of the invention will appear from the dependent claims and the rest of the specification.

In the following part of the specification and with reference to the set of figures, embodiments of the invention will be explained, wherein

Fig. 1 shows a schematic view of a tool with an inflatable packer element arranged thereto for the sealing of an annulus in a hydrocarbon production well. The annulus is formed between the bore wall of the well and a pipe string which is lowered into the well, and the tool is included as part of the pipe string. A section has been made in the right-hand part of the tool, so that the structural configuration of the tool is shown. The tool is shown in a position prior to the inflating of the packer element into sealing abutment against the wall of the well bore.;

Fig. 2 shows the same schematic view, except that the tool is activated for to inflate the packer element by means of a releasable and displaceable housing element which is displaced up along a sleeve element of the tool. Thereby hardenable sealing substance is transferred from two chambers of the releasable and displaceable housing element into an annular chamber of the tool by the packer element;

Fig. 3 shows the same schematic view, except that the releasable and displaceable housing element has been displaced into an end position in which the transfer of the hardenable sealing substance has ended, and the packer element is fully inflated. In addition, the hardenable substance has charged an accumulator positioned in a lower housing element fixedly arranged on the sleeve element;

Fig. 4 shows the same schematic view, except that the accumulator is in an uncharged position, so that it has

compensated for the curing shrinkage of the hardenable sealing substance, and thereby maintained the surface pressure of the packer element against the wall of the well bore;

5 Fig. 5 shows a schematic section of an embodiment of the invention, in which said releasable and displaceable housing element is replaced by a housing element which is fixedly arranged on the sleeve element and has an annular piston arranged thereto. Otherwise, the tool has the same structural
10 configuration as shown in Figs. 1-4, and it is shown in a position prior to the inflation of the packer element into sealing abutment against the wall of the well bore;

Fig. 6 shows the same schematic section as the one shown in Fig. 5, except that the tool is activated to inflate the
15 packer element;

Fig. 7 shows a schematic section of an embodiment of the invention, in which the lower end of the packer element is connected to an upper releasable and slidable housing sleeve element which is arranged externally on the lower fixed
20 housing element. Otherwise, the tool has the same structural configuration as shown in Figs. 1-6, and it is shown in a position prior to the expansion of the packer element into sealing abutment against the wall of the well bore; and

Fig. 8 shows the same schematic section as the one shown in
25 Fig. 7, except that the tool is activated to inflate the packer element.

In the set of figures the present tool, with the inflatable packer element 8 arranged thereto, is shown as a component of

a pipe string 3, e.g. a production pipe, extending down into a well for the recovery of hydrocarbons. This may be done in the way that either end of an inner sleeve element 4 of the tool is secured to the respective end of adjacent parts of the pipe string 3, e.g. by means of threaded connections, not shown. Alternatively the sleeve element 4 may be secured in a suitable manner externally on a pipe string 3 extending therethrough. Said inflatable packer element 8 may be used in the zone isolating or other sealing of the well, so that it is prevented, for instance, that fluid passes in an uncontrolled manner in an annulus 2 between the pipe string 3 and the bore wall 1 of the well. The packer element 8 is inflated by means of a hardenable sealing substance, e.g. a two-component thermosetting plastic, which is transferred from a housing element 7; 30 to an annular chamber 9 of the tool, when at the same time, well fluid, for example, is supplied from the pipe string 3 into the housing element 7; 30. The pipe string 3 is equipped with the number of tools which is required for zone isolation of the well in question.

According to the embodiment shown in Figs. 1-4, the tool comprises three housing elements 5, 6, 7 positioned externally on the inner sleeve element 4, and a packer element 8 extending between two of the housing element 5, 6. The two housing elements 5, 6 first mentioned, are fixedly arranged, and the third housing element 7 is releasably and displaceably arranged on the sleeve element 4. Said releasable and displaceable housing element 7 is secured to the sleeve element 4 by means of not shown securing means, e.g. shear pins. One end of the packer element 8 is fixedly connected to the fixed housing element 5 located the most distant from the releasable and displaceable housing element 7, and the opposite end of the packer element 8 is fixed to a

- packer sleeve element 26. The packer sleeve element 26 is releasably and slidably arranged on that side of the intermediate fixed housing element 6, which faces inwards towards the sleeve element 4. The packer sleeve element 26 is releasably arranged by means of not shown shear screws or corresponding elements. The shear screws break by a predetermined stretching of the packer element 8. Thereby is avoided that the packer element 8 is stretched between the fixed housing elements 5, 6 during inflation.
- 10 The releasable and displaceable housing element 7 is formed with at least three flanges 13, 14, 15, directed inwards towards, and adapted to rest slidably on, the sleeve element 4. Further the sleeve element 4 is formed with at least two flanges 16, 17 directed outwards towards, and adapted to rest
15 slidably on, said housing element 7. The housing element flanges 13, 14, 15 and the sleeve element flanges 16, 17 are positioned alternately one behind the other, so that they form separate chambers 10, 11, 12 between themselves inside the releasable and displaceable housing element 7. The
20 housing element chambers 10, 11 accommodate the hardenable sealing substance which is transferred to the annular chamber 9, and the housing element chamber 12 is to accommodate fluid, e.g. well fluid, supplied from the pipe string 3 when the packer element 8 is inflated. The hardenable sealing
25 substance is in fluid form while in the housing element chambers 10, 11. The well fluid is supplied through at least one passage 13 formed in the sleeve element 4 by the housing element chamber 12. Said passage 13 is equipped with suitable valve equipment.
- 30 The releasable and displaceable housing element 7 is arranged so, that it can be released from and displaced along the

sleeve element 4, when the packer element 8 is to be inflated into sealing abutment against the wall 1 of the well bore.

The releasing and displacing takes place by means of well fluid supplied to the housing element chamber 12 from the pipe string 3. Thereby, the well fluid will press against the housing element flange 15, so that the not shown shear pins break at a predetermined pressure from the well fluid on the housing element flange 15. The releasable and displaceable housing element 7 is then displaced along the sleeve element

4. In the displacement the housing element flanges 13, 14 will be displaced towards the pipe string flanges 6, 17. This involves that, at the same time, the hardenable sealing substance is pressed out of the housing element chambers 10, 11 when the volumes thereof are reduced by the displacing of the releasable and displaceable housing element 7. In the displacing, the well fluid will press against the housing element flange 15, so that the housing element chamber 12 works as a pull cylinder with a piston area corresponding to said housing element flange 15, and with the housing element chambers 10, 11 as connected push cylinders for the hardenable sealing substance, with a piston area corresponding to the housing element flanges 13, 14. Relative to the pressure from the well fluid supplied in the housing element chamber 12, a reduced pressure is thereby achieved in the hardenable sealing substance, which is transferred from the releasable and displaceable housing element 7, according to the ratio of the piston areas.

The hardenable sealing substance is transferred from the housing element chambers 10, 11 to an annular chamber 9 of the tool behind the packer element 8. This is implemented by means 19, 20 for the transfer of the hardenable sealing substance, and an associated valve unit 21. Said means 19, 20

is arranged in the releasable and displaceable housing element 7, and is constituted by e.g. thin pipe elements 19, 20 extending from the respective housing element chambers 10, 11 through the respective housing element flanges 13, 14, pipe string flange 16 and an upper flange 22 of the intermediate fixed housing element 6, so that hardenable sealing substance may be transferred to the annular chamber 9 behind the packer element 8. The valve unit 21 is positioned on that side of said upper housing element flange 22, which faces inwards towards the annular chamber 9, and opens as a consequence of hardenable sealing substance being pressed out of the housing element chambers 10, 11. To retain the hardenable sealing substance within the annular chamber 9, the valve unit 21 is formed as a check valve unit. By preference the non-return effect becomes effective only when the releasable and displaceable housing element 7 has made the full length of its displacement, and the housing elements 10, 11 have been essentially emptied of the hardenable sealing substance, so that the housing element chambers 10, 11 are not influenced by pressure from the well fluid. The components of the hardenable sealing substance are mixed by means of at least one mixing pipe 27 positioned on that side of the packer sleeve element 26, which faces inwards towards the sleeve element 4.

In the type of thermosetting plastic used to inflate the packer element 8, a great deal of the shrinking takes place while the thermosetting plastic is still in fluid form. To compensate for the reduction in volume of the thermosetting plastic, due to said shrinkage, the tool is provided with an accumulator 23, 24, which is adapted so, that the surface pressure of the packer element 8 against the wall 1 of the well bore, is essentially maintained when the hardenable

substance shrinks. The accumulator 23, 24 is charged by means of the hardenable sealing substance supplied during inflation of the packer element 8. The accumulator is formed of a compressible compression spring 23 positioned in an annular chamber 25 between the fixed housing element 5 which is the most distant from the releasable and displaceable housing element 7 and the sleeve element 4, and an associated displaceable flange arranged to rest glidingly on the fixed housing element 5 and the sleeve element 4.

10 In Figs. 5-6 another embodiment of the invention is shown. The difference between the embodiments consist in the fact that the third housing element 30 is fixedly arranged on the housing element 4 and, moreover, has a displaceable annular piston 31 arranged thereto. Otherwise, the tool has a structural configuration and operation corresponding entirely to that of the tool mentioned above. The annular piston 31 is arranged so, that the hardenable sealing substance is transferred from the housing element 30 to the annular chamber 9, when the annular piston 31 is displaced, at the same time, along the sleeve element 4 by means of the well fluid supplied. The fixed housing element 30 is provided with at least three flanges 35, 36, 37 fixedly arranged on the sleeve element 4, and the annular piston 31 is provided with at least two flanges 38, 39 adapted to rest slidingly on the fixed housing element 30 and the sleeve element 4. The flanges 38, 39 of the annular piston is positioned on either side of the middle housing element flange 36, so that the flanges 35, 36, 37, 38, 39 of the housing element and the annular piston form, between themselves, separate housing element chambers 32, 33 for the hardenable sealing substance which is transferred when the packer element 8 is to be inflated, and a housing element chamber 34 for the well

fluid, which is supplied to displace the annular piston 31 along the sleeve element 4. The housing element 30 is formed with at least one vent 40 at the lower housing element flange 35.

5 In Figs. 7-8 is shown an alternative configuration of the fixed housing element 50, 51 the most distant from the releasable and displaceable housing element 7 or the fixed housing element 30 with the annular piston 31. Thereby further security can be provided against stretching of the
10 packer element between the fixed housing element 50, 51 and the packer sleeve element 26, during inflation. Here, the housing element is formed by a lower housing element 50, which is fixedly arranged on the sleeve element 4, and an upper housing sleeve element 51, which is releasably and
15 glidably arranged externally on the lower housing element 50. The sleeve element 4 is provided with a number of support elements 53, each with an associated locking pin 54. The locking pins 54 are adapted to rest releasably in a groove 55 formed in the housing sleeve element 51, so that the housing
20 sleeve element 51 is retained until the tool is activated to inflate the packer element 8. Then, when hardenable sealing substance is transferred to the annular chamber 9 during inflation, some of the transferred hardenable sealing substance will flow past the support elements 53 and the
25 locking pins 54, so that the hardenable sealing substance urges the flange 52 and the compression spring 23 downwards within the annular chamber 25 to charge the accumulator. The displacement of the flange 52 downwards in the annular chamber 25, results in the locking pins 54, which were
30 pressed, prior to the displacement, by the flange 52 into locking engagement with the groove 55, being disengaged from the groove 55 of the housing sleeve element 51. Thereby the

packer element 8 may pull the housing sleeve element 51 along during the inflating. In a transition zone between the lower housing element 50 and the upper housing sleeve element 51 the respective element is formed with recesses 56, 57 adapted
5 to one another.

In the set of figures the releasable and displaceable housing element 7, or the fixed housing element 30 with the annular piston 31, is positioned above the fixed housing elements 5, 6; 50, 51. Of course, this does not prevent the housing
10 elements 7; 30 first mentioned, from being positioned below the housing elements 5; 6; 50, 51 last mentioned. In that case, the housing elements 5, 6; 50, 51 last mentioned must change places. Neither is there anything to prevent the releasable and displaceable housing element 7, or the fixed
15 housing element with the annular piston 31, from being formed with more housing element chambers than the housing element chambers 10, 11, 12 shown. The condition is only that there shall be more chambers for the hardenable sealing substance than chambers for the well fluid supplied, so that the
20 mentioned pressure reduction is maintained in the hardenable sealing substance which is transferred to the annular chamber 9. Besides, it is obvious that the releasable and displaceable housing element 7, or the annular piston 31 within the fixed housing element 30, may be released from and
25 displaced, or displaced, on the housing element 4 by means of a different suitable fluid than the well fluid mentioned, e.g. a hydraulic fluid, supplied from the surface in a suitable manner.

C L A I M S

1. A device by a tool for the setting of an inflatable packer in an annulus (2) of a well for the recovery of hydrocarbons, the annulus (2) being formed between a bore wall (1) of the well and a pipe string (3), e.g. tubing, lowered into the well, characterized in that the tool comprises a sleeve element (4), three housing elements (5, 6, 7; 30; 50, 51) positioned externally on the sleeve element (4), and a packer element (8) extending
10 between two of the housing elements (5, 6; 50, 51), said two housing elements (5, 6; 50, 51) being fixedly arranged on the sleeve element (4), and in that the third housing element (7; 30) is arranged so, that a hardenable substance is transferred from said housing element (7; 30) to an annular
15 chamber (9) of the tool between the sleeve element (4) and the packer element (8), so that the packer element (8) is inflated into sealing abutment against the wall (1) of the well bore, when for instance well fluid from the pipe string (3) is supplied, at the same time, to said housing element
20 (7; 30), said third housing element (7; 30) being formed with more chambers (10, 11; 32, 33) for the hardenable sealing substance than chambers (12; 34) for the well fluid supplied from the pipe string (3), whereby the packer element (8) is inflated into sealing abutment against the wall of the well
25 bore, by a lower pressure than the pressure from the well fluid supplied to said housing element (7; 30).

2. A device according to claim 1, characterized in that the third housing element (7) is releasably and displaceably arranged on the sleeve element (4), the
30 releasable and displaceable housing element (7) being arranged to be released from and displaced along the sleeve

element (4) by a predetermined pressure of the well fluid supplied to the chamber (12), whereby the hardenable sealing substance is transferred from the chambers (10, 11) to the annular chamber (9) when the releasable and displaceable housing element (7) is displaced, at the same time, along the sleeve element (4) by means of the well fluid supplied to the chamber (12).

3. A device according to claim 2, characterized in that the releasable and displaceable housing element (7) is formed with at least three flanges (13, 14, 15) directed inwards towards, and arranged to rest glidingly on, the sleeve element (4), and that the sleeve element (4) is formed with at least two flanges (16, 17) which are directed outwards towards, and adapted to rest glidingly on, the housing element (7), so that the flanges (13, 14, 15, 16, 17) form separate chambers (10, 11, 12) in the releasable and displaceable housing element (7) for the hardenable sealing substance transferred to inflate the packer element (8), or for the well fluid supplied to release and displace the housing element (7).

4. A device according to claim 1, characterized in that the third housing element (30) is fixedly arranged on the sleeve element (4) and has an annular piston (31) arranged thereto, the annular piston (31) being arranged to be displaced along the sleeve element (4), whereby the hardenable sealing substance is transferred from the chambers (32, 33) to the annular chamber (9) when the annular piston (31) is displaced, at the same time, along the sleeve element (4) by means of the well fluid supplied to the chamber (34).

5. A device according to claim 4, characterized in that the fixed housing element (30) is formed with at least three flanges (35, 36, 37) fixedly arranged on the sleeve element (4), that the annular piston (31) is formed with at least two flanges (38, 39) adapted to rest glidingly on the fixed housing element (30) and the sleeve element (4), the flanges (38, 39) of the annular piston (31) being positioned on either side of the middle flange (36) of the fixed housing element (30), so that the flanges (35, 36, 37, 38, 39) form separate chambers (32, 33, 34) within the fixed housing element (30) for the hardenable sealing substance, which is transferred to inflate the packer element (8), or for the well fluid which is supplied to displace the annular piston (31) along the sleeve element (4).

6. A device according to any one of the preceding claims, characterized in that the sleeve element (4) is formed with at least one passage (18) to the chamber (12; 34), which is to accommodate the well fluid.

7. A device according to any one of the preceding claims, characterized in that the releasable and displaceable housing element (7), or the fixed housing element (30), is provided with means (19, 20) for transferring hardenable sealing substance to the annular chamber (9), when the releasable and displaceable housing element (7) or the annular piston (31), is displaced along the housing element (4), and an associated valve unit (21).

8. A device according to claim 7, characterized in that said means for transferring the hardenable substance is formed by thin pipe elements (19, 20) extending from the respective housing element chamber (10, 11; 32, 33)

for hardenable sealing substance, and through a flange (22) in the intermediate fixed housing element (6) and that the valve unit (21) is positioned on that side of said flange (22), which faces the packer element (8).

5 9. A device according to any one of the preceding claims, characterized in that the packer element (8) by the intermediate fixed housing element (6) is connected to a packer sleeve element (26) which is releasably and glidably arranged between the housing element (4) and said fixed
10 housing element (6).

10. A device according to any one of the preceding claims, characterized in that the fixed housing element (50, 51) the most distant from the releasable and displaceable housing element (7), or the fixed housing
15 element (30) with the annular piston (31), is formed of a lower housing element (50) fixedly arranged on the sleeve element (4), and an upper housing sleeve element (51) which is releasably and slidably arranged externally on the lower housing element (50).

20 11. A device according to claim 10, characterized in that the housing sleeve element (51) is releasably arranged on the lower housing element (50) by means of a number of support elements (53), which are arranged on the sleeve element (4), and equipped with a
25 locking pin (54) each, the locking pins (54) being arranged to rest disengageably against a groove (55) formed in the housing sleeve element (51).

12. A device according to claim 10, characterized in that the packer element (8) is connected to the housing sleeve element (51).

13. A device according to any one of the preceding claims, characterized in that the tool has an accumulator (23, 24; 52) arranged thereto, said accumulator (23, 24; 52) being charged by means of the hardenable sealing substance which is transferred to the annular chamber (9) to inflate the packer element (8).


14. A device according to claim 13, characterized in that the accumulator is formed by a compressible compression spring (23) positioned in an annular chamber (25) between the sleeve element (4) and the fixed housing element (5; 50, 51) the most distant from the releasable and displaceable housing element (7), or the fixed housing element (30) with the annular piston (31), and a displaceable flange (24; 52) arranged thereto and adapted to rest slidingly on the sleeve element (4) and the fixed housing element (5; 50, 51).


15. A device according to any one of the preceding claims, characterized in that the tool has at least one mixing pipe (27) arranged thereto, for the hardenable sealing substance which is transferred from the releasable and displaceable housing element (7), or the fixed housing element (30) with the annular piston (31).

16. A device according to claim 15, characterized in that said mixing pipe (27) is positioned in the intermediate fixed housing element (6), and on that side of

the packer sleeve element (26), which faces inwards towards the sleeve element (4).

1/8

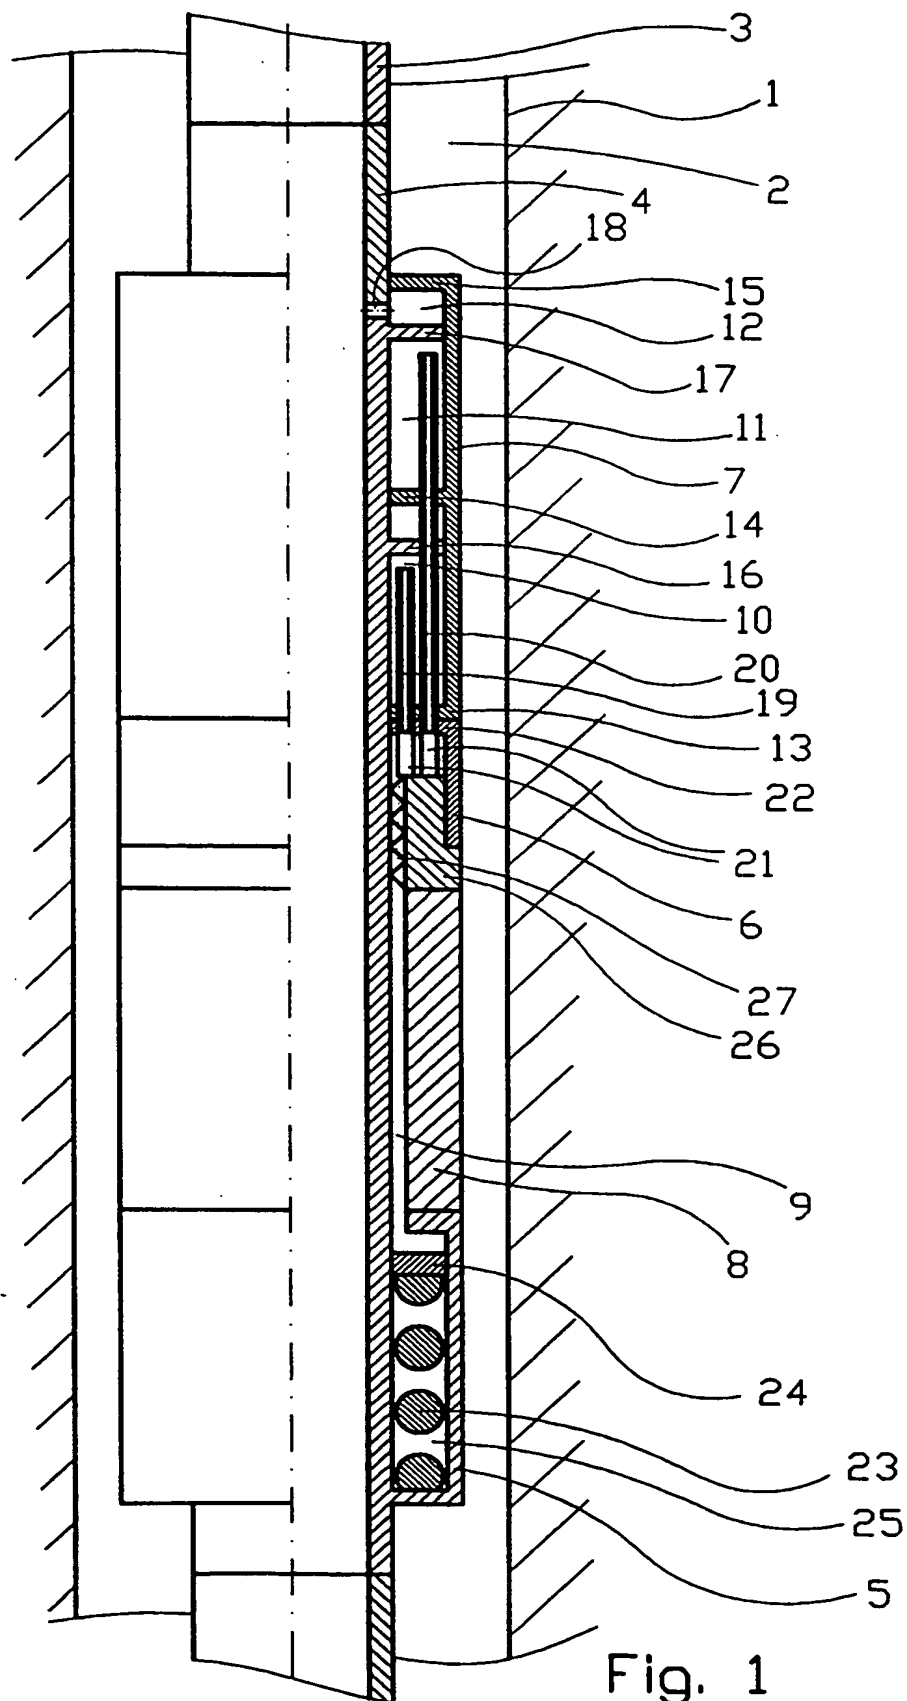

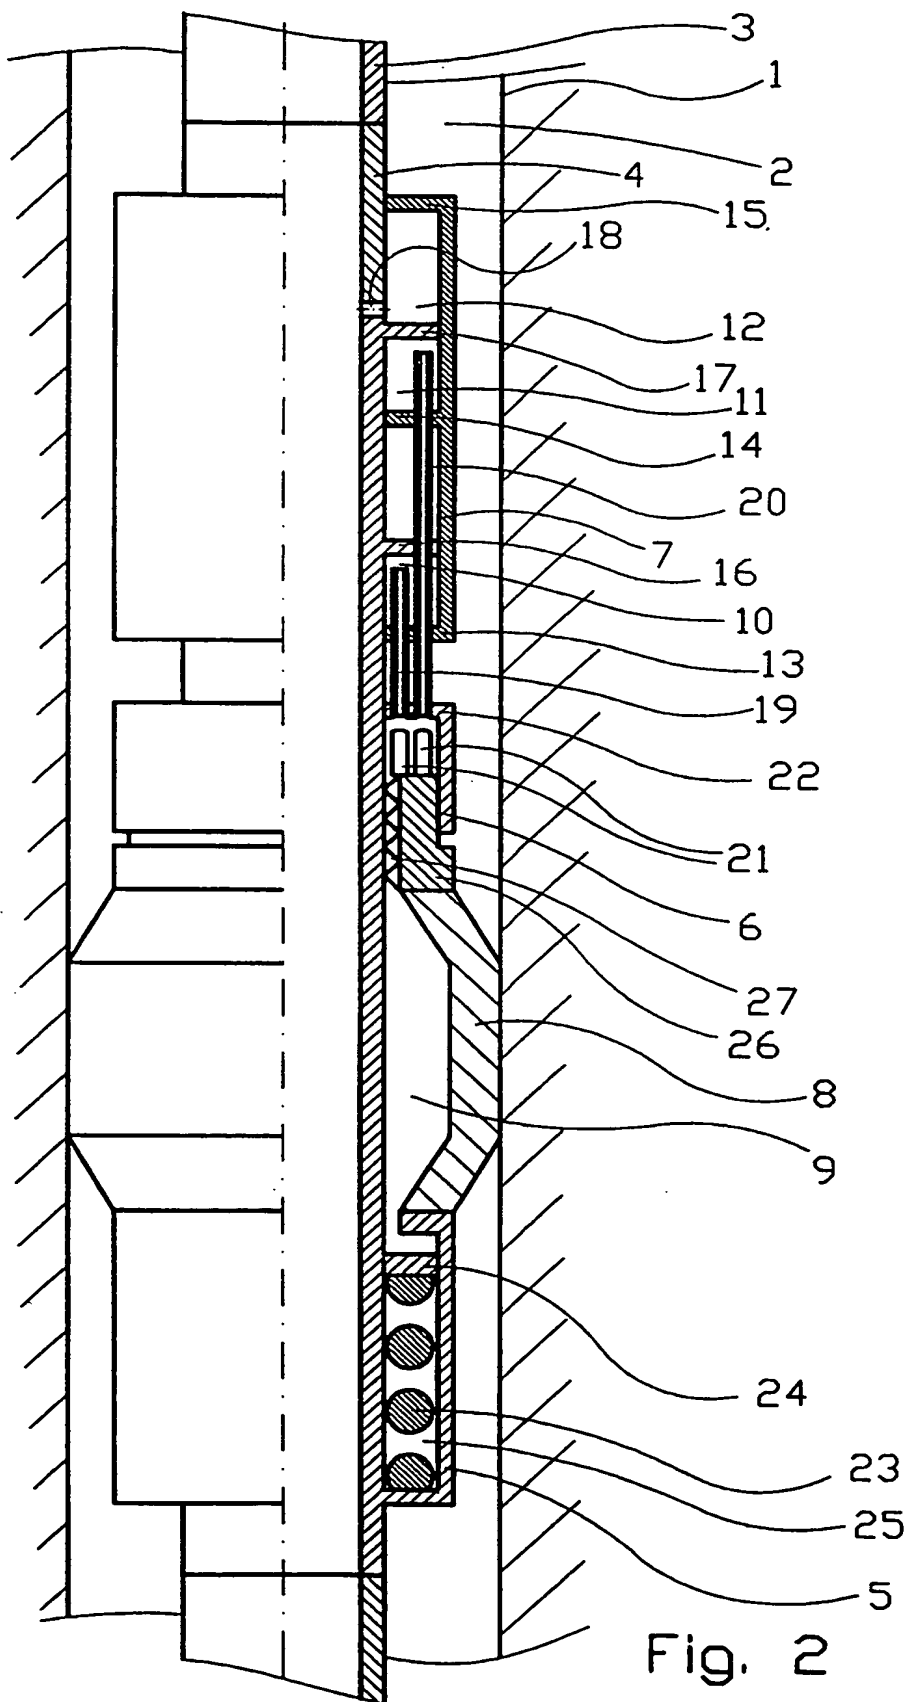


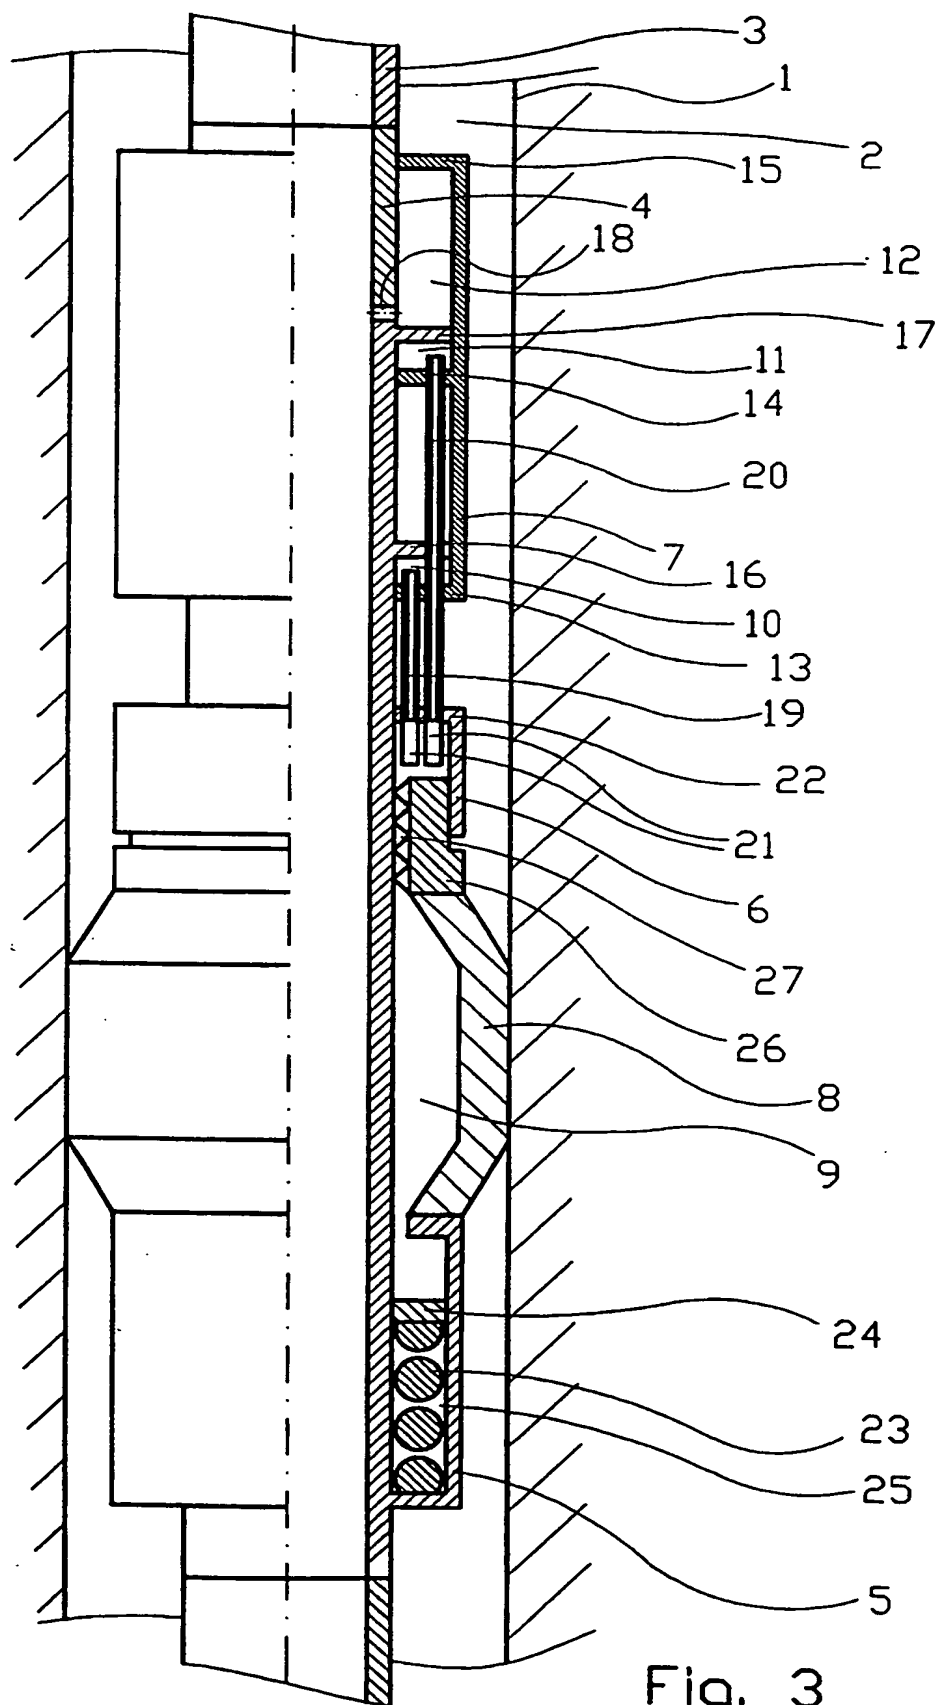


Fig. 3

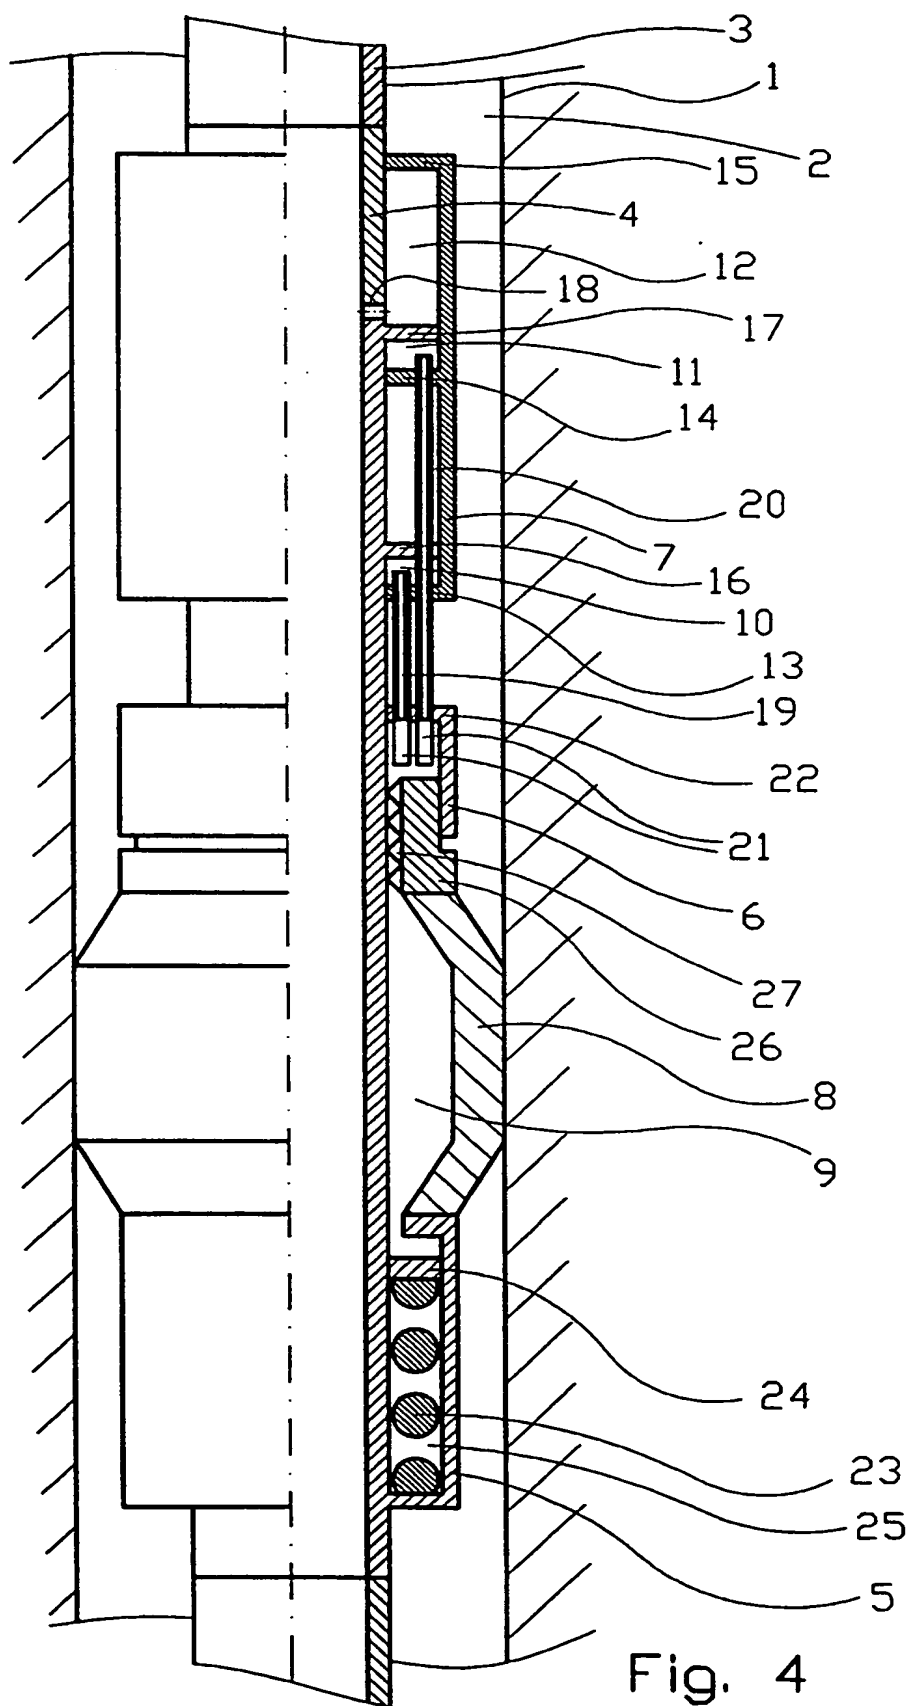

5/8

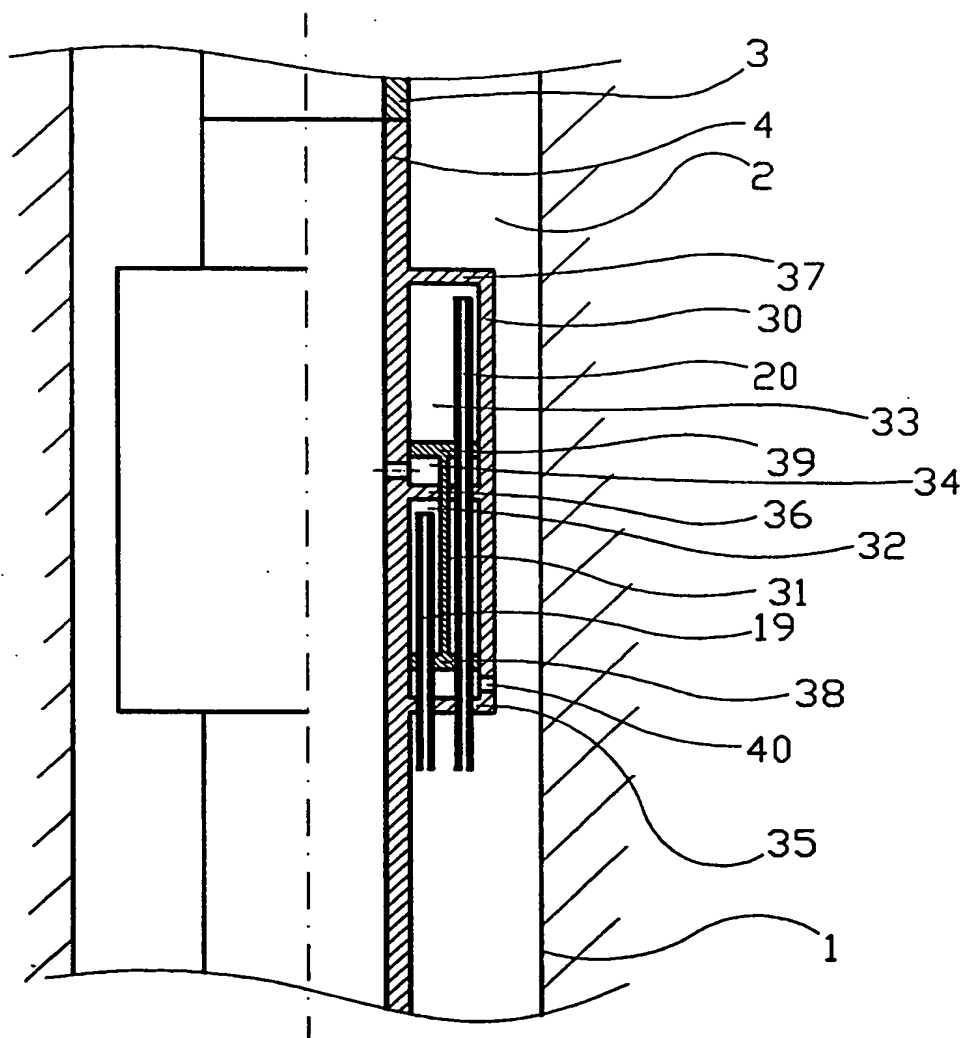


Fig. 5

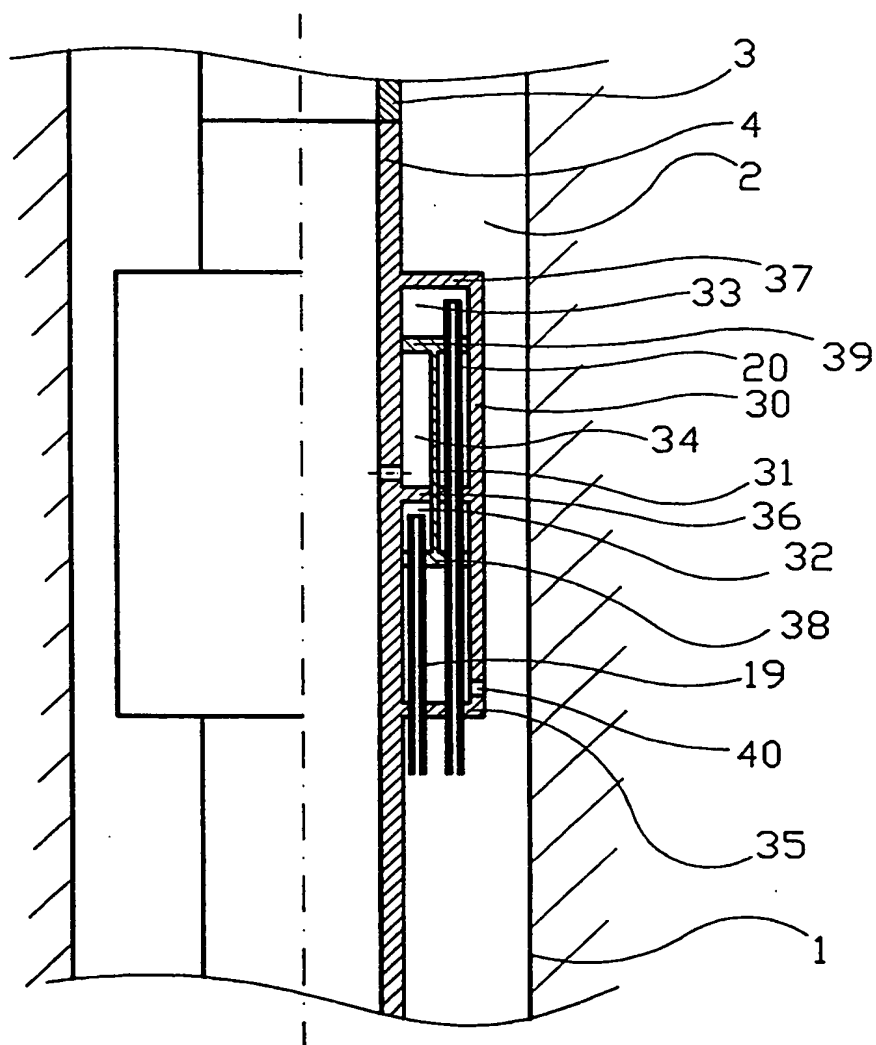


Fig. 6

7/8

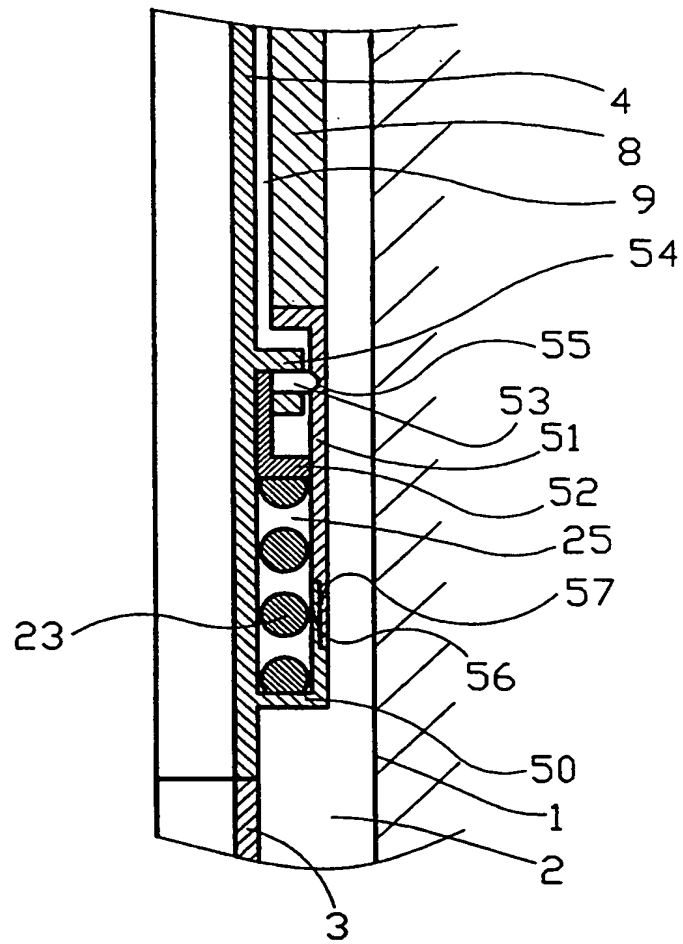


Fig. 7

8/8

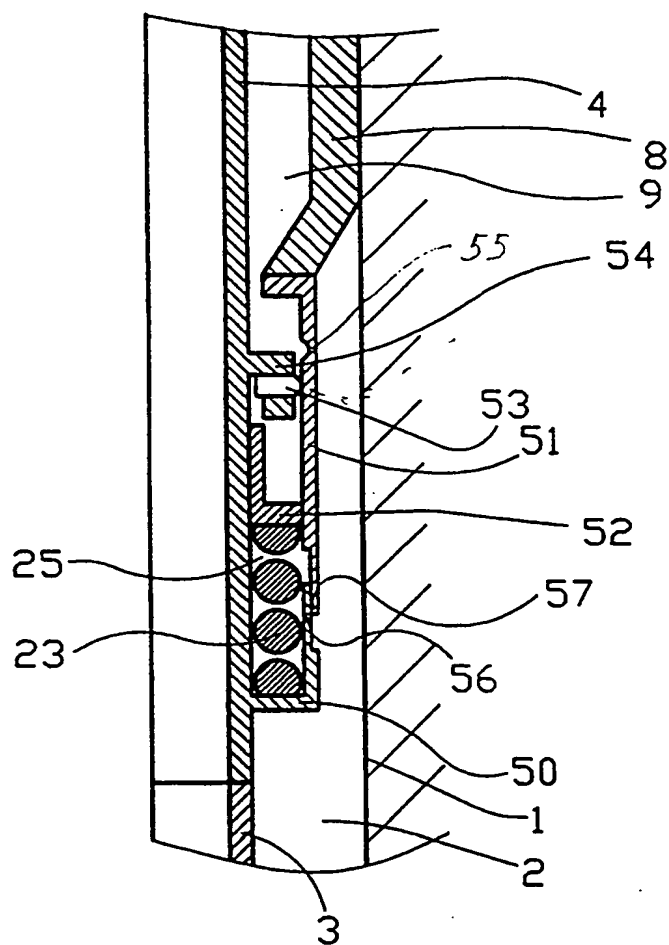


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 99/00366

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21B 33/127, E21B 23/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3575238 A (H.E. SHILLANDER), 20 April 1971 (20.04.71) --	1-16
A	US 3750750 A (H.J. URBANOSKY), 7 August 1973 (07.08.73) --	1-16
A	GB 1159534 A (MINERALIMPEX), 30 July 1969 (30.07.69) --	1-16
A	GB 2300015 A (BAKER HUGHES INCORPORATED), 23 October 1996 (23.10.96) -- -----	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 March 2000

Date of mailing of the international search report

19-04-2000

Name and mailing address of the ISA

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert / MR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/99

International application No.
PCT/NO 99/00366

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	3575238	A	20/04/71	NONE	
US	3750750	A	07/08/73	NONE	
GB	1159534	A	30/07/69	NONE	
GB	2300015	A	23/10/96	AU 709878 B	09/09/99
				AU 5065996 A	31/10/96
				CA 2174174 A	18/10/96
				GB 9607924 D	00/00/00
				NO 961505 A	18/10/96
				US 5582251 A	10/12/96